



ELECTRO-HYDRAULIC SERVO CONTROL UNIVERSAL TESTING MACHINE (Multi Wire Strand) 1200kN

Standard: BS EN 10002-1, BS 5896, ISO 7500-1, ASTM A370, ASTM A1061/A

Tensile & Compression

This CL 6000 Series UTM used for the mechanics property test such as the tensile, bending, compression and etc to various metallic and non-metallic materials. The testers have been developed according to BS EN 10002-1, ISO 7500-1 & ASTM A370 "Metal Tensile Test Method" with the adoption of the electro-hydraulic servo control and electronic measurement. It can automatically process the test result for statistical purpose and print default or user-defined test report.

CL 6000 Series UTM use the micro-computer automatic data collection and processing, real time display of the test data and curves. It has the functions such as unlimited storage of test result in the computer, printing the test results and curves, processing the batch test result report, managing the database and so on. It also has the network interface. It can automatically seek the multiple technical parameters such as elastic module E, upper yield strength ReH, lower yield strength REL, stipulated non-proportional elongation intensity Rr, tensile strength Rm, stipulated total elongation intensity Rt, yield point percentage elongation and etc.

CL 6000 Series UTM have the features such as the high precision, advantage performance, high reliability, convenient operation and etc.

OPERATION DISPLAY

Computer Screen Display unit with the following functions

- *Test force display
- *Break detection
- *Full auto test range switching function
- *Auto return function
- *Peak / Break value display function
- *Test conditions

SAFETY FEATURES

The system include with the followings safety features

- *Emergency stop switch
- *Overload limit
- *Ram-stroke limit
- *Hydraulic pump motor over-current & over heating protection
- *Leak / over current protection
- *Automatic stop control
- *Safety Guard

CONTROL & DATA PROCESSING SOFTWARE

- *User friendly & easily due to clear and brief operation – operation interface
- *Automatically save the test conditions & results
- *User define test curves including : Stress / Strain, Force / Elongation, Strength / Time to suit various requirement
- *Individual or combine display test curves on the same screen to compare with other several data at the same time
- *Compatible with Microsoft Excel by import or export function
- *Base of testing with digital sample break detection, auto ranging, auto calibration, quick tare & auto return facilities
- *Exceeds all International Standards for accuracy, ASTM, DIN, ISO, JIS, EN, GB...etc
- *Tension, Compression, Shear, Cycling & Creep Test facilities
- *User define Real Time Display Including Load, Stress, Elongation, Strain, Speed or Time
- *Advanced protection features with software setting or / & hardware switch upper & lower limit setting
- *Operation fully control by computer
- *USB communication system & ethernet
- *Grips & fixtures for tension, compression, flexural, shear & products testing available
- *Fully user define report including Report Sheet, Label, Chart & Bitmap or JPG
- *Report sheet consist of Load, Elongation, Yield, Break, Stress Modulus, Strain, Tear Strength, Peel Strength etc
- *Force display unit : kN,N,tons, & mN
- *Stress display unit : GPa,Mpa,Pa,psi,N/sq.mm,Kg/sq.mm & Tons/sq.inch
- *User define Yield Strength, Young Modulus, Offset Setting, Graph Offset, Export & Import test data, ...etc

Unique Feature :

- *Over size prestressed 4 column with twin screw
- *High toughness fragment safety guard with transparence sliding door
- *High precision load cell ram
- *Built-in shock absorbing system on base mounting
- *Console Control Unit

1200kN Specification**Technical Specifications :**

Model Number	CL 6KSX / 029
Load. Capacity	1200 kN
Machine Class	Class 1
Load. Accuracy	±1%
Displacement Resolution	0.001 mm
Max. Compression Space	900 mm
Max. Tensile Space	1000 mm
Piston Stroke	200 mm
Max. Cross Head Speed	240 mm/min
Test Speed	100 mm/min
Wire Strand Size	Ø8 - Ø18 mm
Round Specimen Size	Ø14 - Ø45 mm
Flat Specimen Size	40 mm
Max. Distance of Bending Test	300 mm
Size of Compression Platen	Ø225 mm

Effective Measurement Range	1% - 100% FS (Full Range without binning)
Deformation Measurement Range	1% - 100% FS
Relative Error of Deformation Indication	±1%
Relative Error of Displacement Indication	±1%
Relative Error of Displacement Rate Control	±1%
Strain Rate Control Adjustment Range	0.00025/s / 0.0025/s
Relative Error of Strain Rate Control	±2%
Force, Deformation & Displacement	0.3% - 100% FS
Retention Control	
Relative Error of Force, Deformation & Displacement Retention Control	≤1%
Horizontal Clearance (max)	505 mm
Dimension (Frame)	1050 (L) x 800 (W) x 2800 (H) mm
Dimension (Control Console)	1100 X 750 X 900 mm
Power	380 - 415 V, 2.2 kw / 0.4 kw, 50 / 60 Hz
Weight (Control Console)	300 kg
Weight (Frame)	3500 kg

Unit Standard Accessories :

Model Number	Accessories Description	Qty
CL 6KSX / 029 – P 001	Flat Specimen Jaw Set (0 - 20 mm Thick)	1set
CL 6KSX / 029 – P 002	Round Specimen Jaw Set A (Ø13 - Ø26 mm)	1set
CL 6KSX / 029 – P 003	Round Specimen Jaw Set B (Ø26 - Ø40 mm)	1set
CL 6KSX / 029 – P 004	Compression Platen Set (Ø225 mm)	1set
CL 6KSX / 029 – P 006	Footing Stopper Bar c/w Wall Plug (2 Bar & 4 Plugs)	1set
CL 6KSX / 029 – P 007	Wire Strand Jaw Set (Ø8 - 18 mm)	1set
CL CP – 200	Computer Printer	1unit
CL 6000 X TSL	2 Step Ladder	1unit
CL SVP – 2.2	Servopack Console Control Unit with Built-in Computer and Pre-Installed with TestMaster Software	1unit




Front Grip


*1 Copy of Manual Instruction



Compression Plated Set

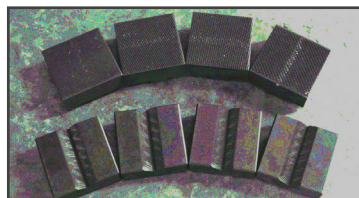

V-Shaped & Flat Jaws



Stopper Bar




Computer Printer

Optional Accessories :

Model Number	Accessories Description
CL AEX – 25/10	Axial Electronic Extensometer (GL25 / D10)
CL AEX – 50/25	Axial Electronic Extensometer (GL50 / D25)
CL AEX – 100/25	Axial Electronic Extensometer (GL100 / D25)
CL AEX – 500/25	Axial Electronic Extensometer for PC Strand (GL500 / D25)
CL 6000 X / BRD	Bend & Re-bend Device
CL 6000 X / BRD – A1	Bending Holder & Mandrel Set
CL 6000 X / AGP1	Aluminium Grip Piece (T=1.5mm) For 12.7mm Wire
CL 6000 X / AGP2	Aluminium Grip Piece (T=2.4mm) For 12.7mm Wire
CL 6000 X / AGP3	Aluminium Grip Piece (T=1.5mm) For 15.6mm Wire


*1 Copy of Manual Instruction




CL 6000 X / BRD



CL 6000 X / BRD – A1




CL 6000 X AGP

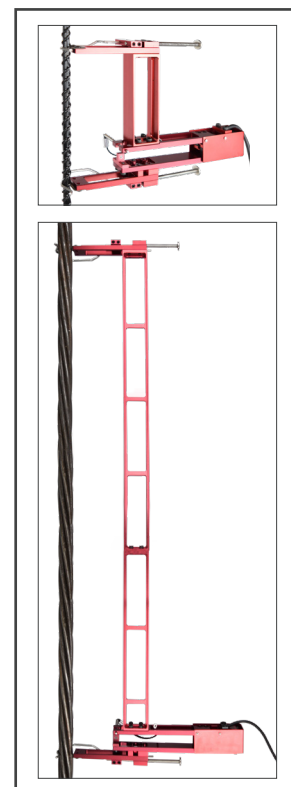


Extensometers


TEST REPORT SOFTWARE

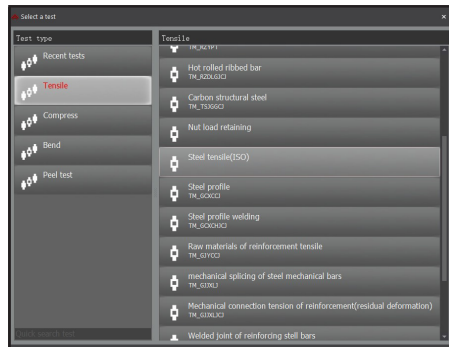

Testing Type List

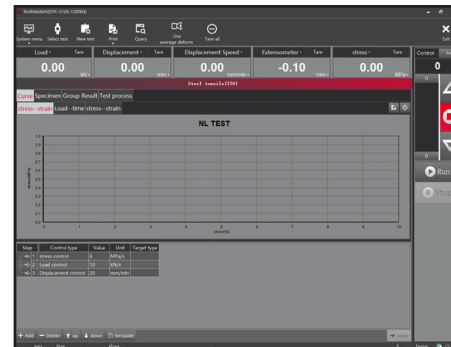

Main Testing Interface

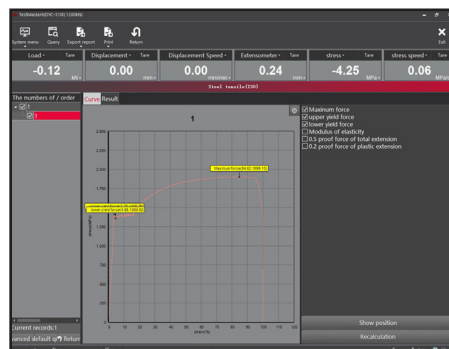

Result Display Interface

The screenshot shows a Microsoft Excel spreadsheet titled "Steel tensile(SO)". The spreadsheet is open in the "Formulas" tab, which is highlighted in the ribbon. The ribbon also shows other tabs: File, Home, Insert, Draw, Layout, Formulas, Data, Review, View, and Help. The "Formulas" tab includes options for "Calculate Now", "Calculate When Returning", "Calculate on Cell Change", "Calculate on Enter", "Calculate on Selection Change", "Calculate on Scroll", "Calculate on Window Change", "Calculate on Window Resize", "Calculate on Window Size Change", "Calculate on Window Position Change", "Calculate on Window Maximize", "Calculate on Window Restore Down", "Calculate on Window Close", "Calculate on Window Hide", "Calculate on Window Show", "Calculate on Window Activate", "Calculate on Window Deactivate", "Calculate on Window Focus", "Calculate on Window Blur", "Calculate on Window Unfocus", "Calculate on Window Unblur", "Calculate on Window Unfocus", "Calculate on Window Unblur", "Calculate on Window Unfocus", "Calculate on Window Unblur".

The spreadsheet contains a table with the following data:

Order	Material name	Material size	Tensile strength (N/CM²)	Yield strength (N/CM²)	Modulus of elasticity (N/CM²)	Percentage of elongation of specimen
1	6002	55 mm	3379	35.41	2133	30 34.2

The status bar at the bottom of the window indicates "Formulas" and "Page: 1".

Exported Test Result



2 Steps Ladder